


Care instruction



Hand wash



Do not bleach



Iron at low temperature



Do not dry clean

Fabric content



100% olefin fiber

Technical information

width : 150 cm

weight : 238 gram / m²

abrasion (rubs) : 10.000

BS EN 14465 : 2003 Annex A

Fabric delivery time

stock in China : 2-3 days

stock in Indonesia : 20 days (MOQ 50 meters)

no stock : 40 days

Treatment




| | | |
|---|-------|--------------------|
| colorfastness to light | _____ | grade 7-8 (max 8) |
| colorfastness to DRY rubbing | _____ | pass |
| colorfastness to WET rubbing | _____ | pass |
| colorfastness to chlorinated pool water | _____ | grade 4-5 (max 5) |
| colorfastness to sea water | _____ | grade 4-5 (max 5) |
| water repellency | _____ | grade 90 (max 100) |
| flammability | _____ | pass |
| anti Mildew | _____ | pass |
| pilling resistance | _____ | grade 5 (max 5) |
| seam slippage | _____ | pass |
| tear strength | _____ | pass |
| tensile strength | _____ | pass |

NOVATEX




420082-01

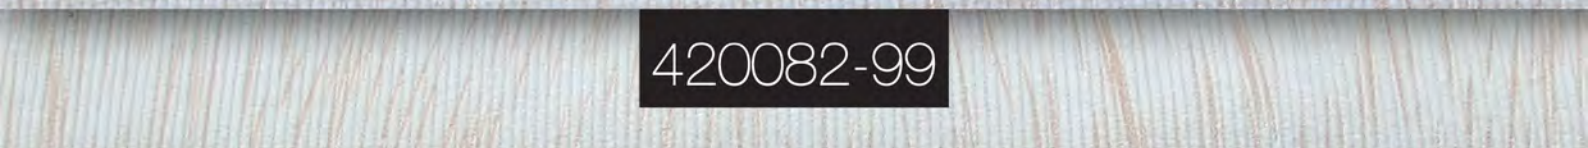


420082-99



420082-02

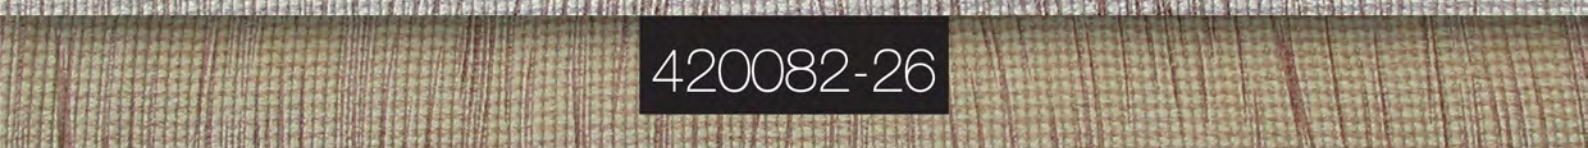

420082-26

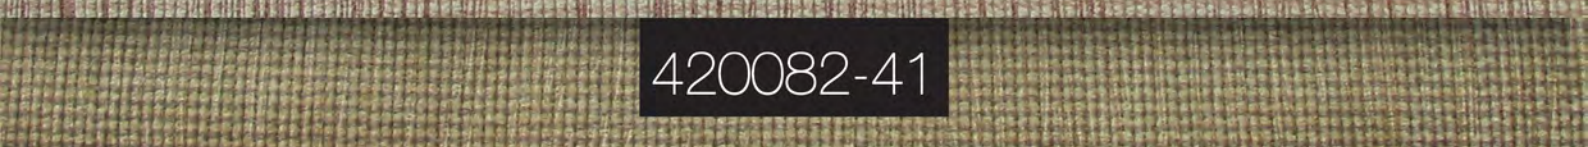

420082-41




420082-23



420082-14



420082-21

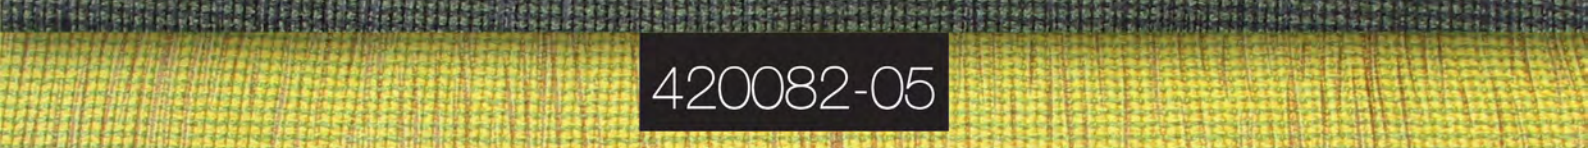


420082-05




420082-06



420082-20

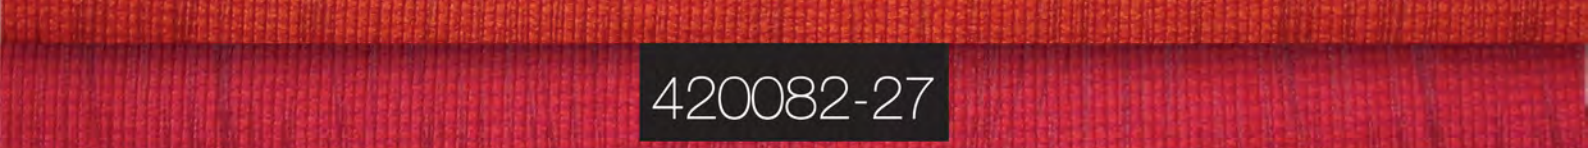

420082-27



420082-07

NOVATEX



420082-43




420082-45



420082-03



420082-11

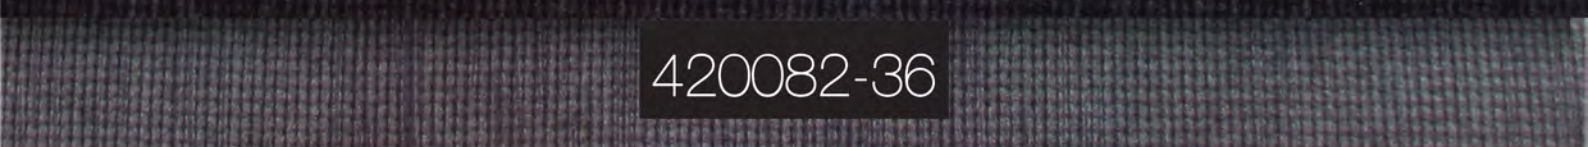

420082-36


NOVATEX



52763-27




52763-02




52772-02




52763-01

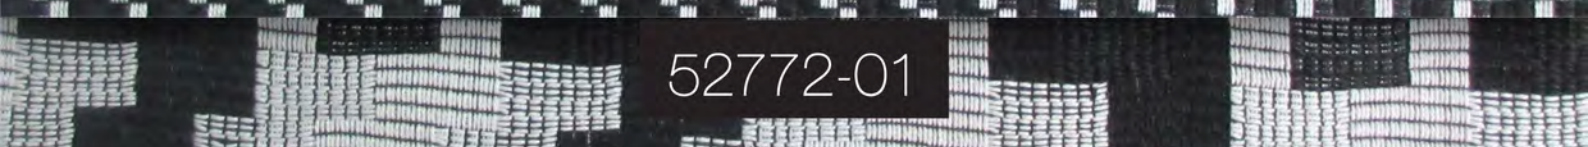


52772-01

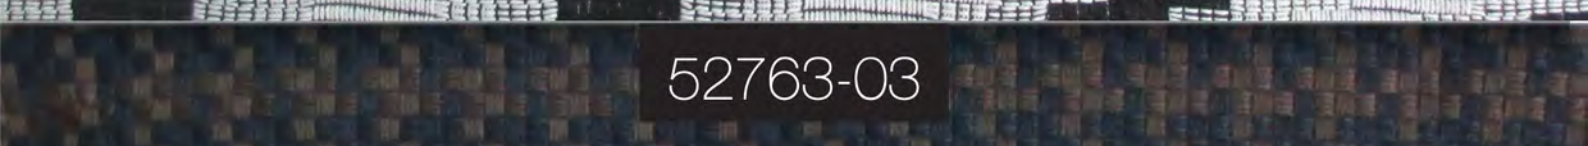


52763-03

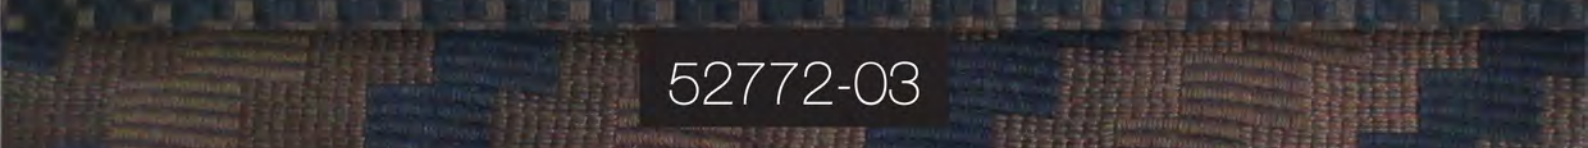

52772-03

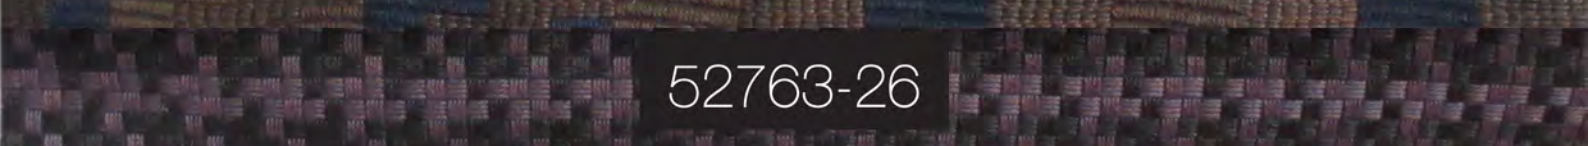

52763-26

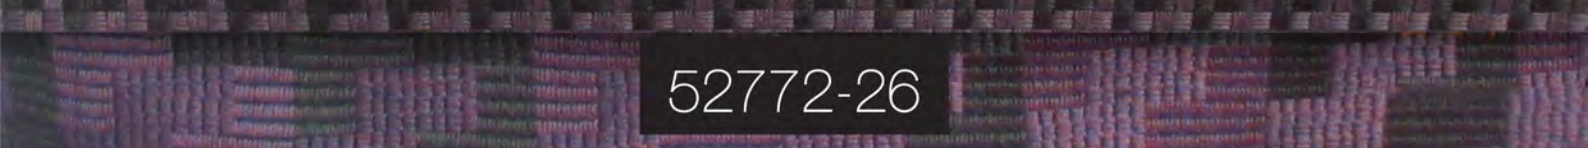

52772-26