CARTENZA

Care instruction



Wash at 40°C

Bleaching allowed (chlorine and oxygen)



Iron at low temperature



Do not dry clean

Tumble drying (low temperature)

Fabric content

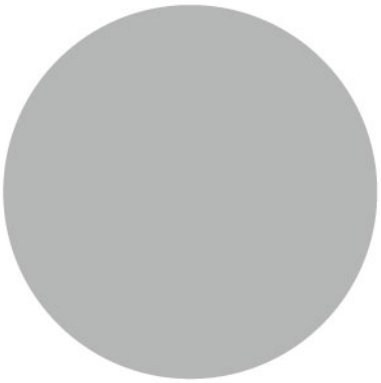

100% olefin fiber

Technical information

width : 150 cm
weight : 238 gram / m2
abrasion (rubs) : 10.000
BS EN 14465 : 2003 Annex A

Fabric delivery time

stock in China : 2-3 days
stock in Indonesia : 20 days (MOQ 50 meters)
no stock : 40 days

Treatment

colorfastness to light	grade 7-8 (max 8)
colorfastness to DRY rubbing	pass
colorfastness to WET rubbing	pass
colorfastness to chlorinated pool water	grade 4-5 (max 5)
colorfastness to sea water	grade 4-5 (max 5)
water repellency	grade 90 (max 100)
flammability	pass
anti Mildew	pass
pilling resistance	grade 5 (max 5)
seam slippage	pass
tear strength	pass
tensile strength	pass

CARTENZA

050

100

101

010

151

150

110

030

020

021

070

230

220

CARTENZA

161

130

164

165

140

142

180

182

181

163

081

120

090
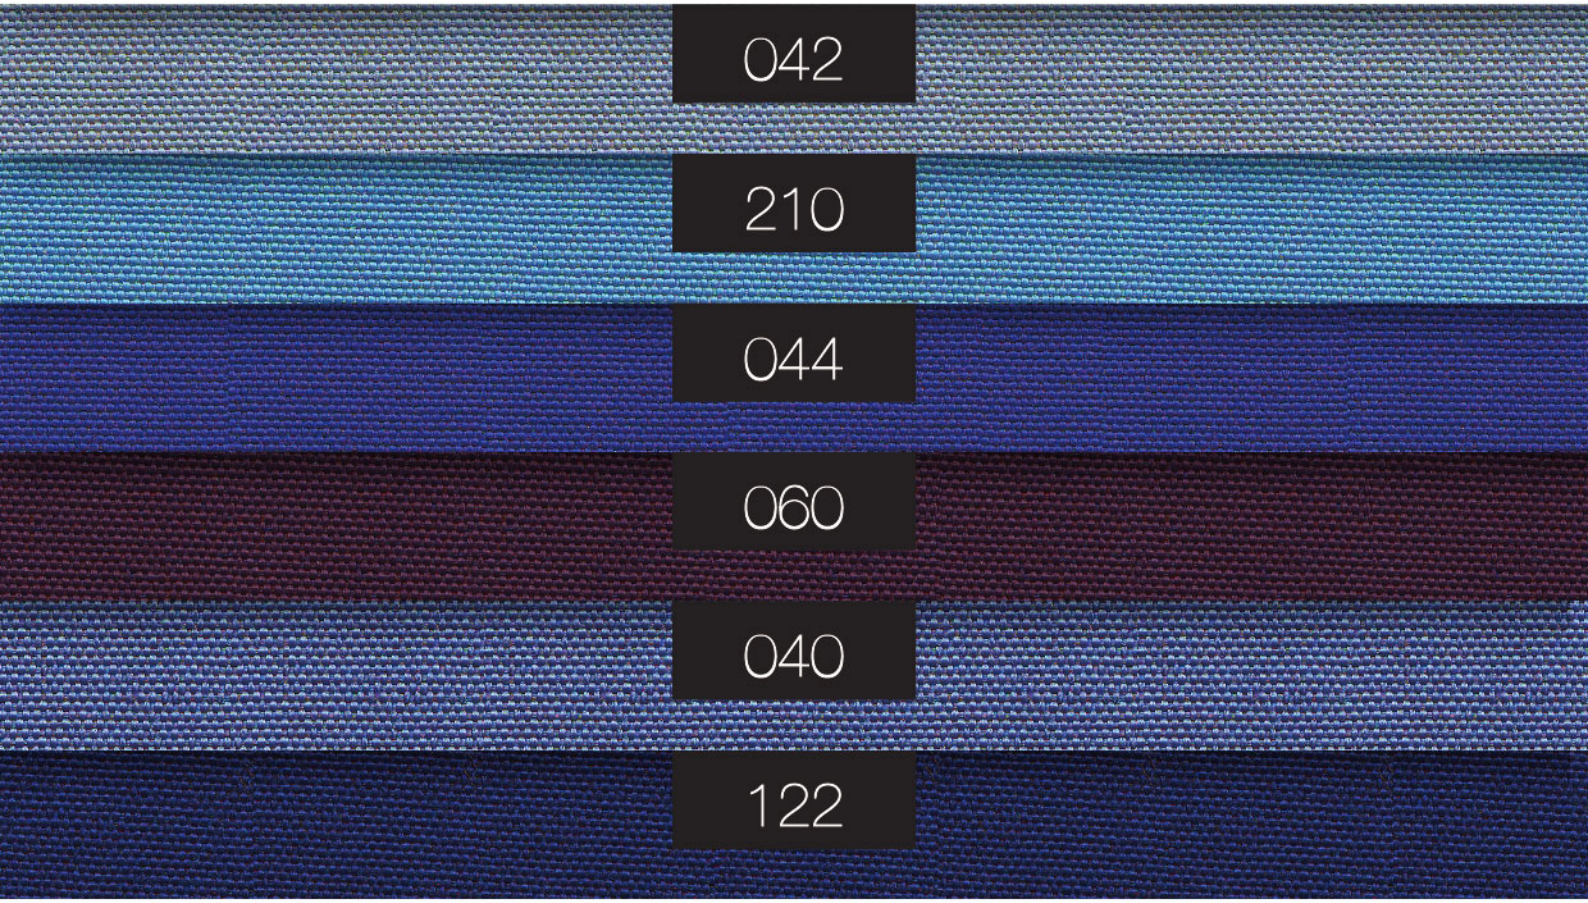
CARTENZA